Power Switches (with Potentiometer)

VB16L43PHS (A39S1PHD)

(Rotary type)



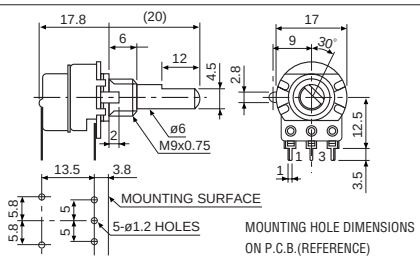

Power Switches (Push-Look type)

APPLICATIONS

- Television. monitors, AV system and other electronic equipment.

SY17-1-1

(PCB Terminal)
(DPST)



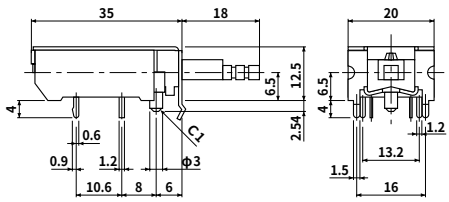

SY16-1-2

(PCB Terminal)
(SPST)



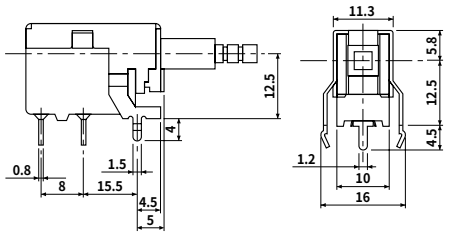

SY17-2-2

(Lead-wire Terminal)
(DPST)



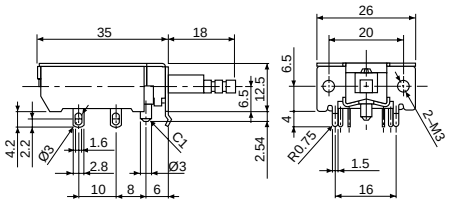

SY16-2-4

(Lead-wire Terminal)
(SPST)



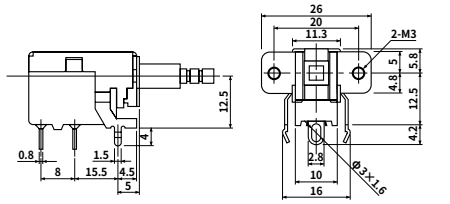

List of Power Switch Ratings

Operation	Combined Function	Model	Pole & Throw	Terminals		Listed undr Safety Standards						
				Solder Lug	PCB Lug	Electronics Appliance	General Appliance	UL	CSA	VDE	SEMKO	BS
						Applicable Load Life Tests						
						Test B	Test A	Test C	Test C	Test D	Test D	Test D
						125VAC (A)				250VAC		
Rotary Types	w/16mm pot. (VB16L43)	B39S1	SPST	○	○	1	3	–	–	–	–	–
		A39S1				3	6	TV3	TV3			
Push-Lock Types	SY17	U1D1	DPST	○	○	5	10	TV8	TV8	8A/128A Class Iu	8A/128A Class Iu	8A/128A Class Iu
		U1S1	SPST									
	SY16	U99S2	SPST	○	○	5	10	TV5	TV5	5A/80A Class Iu	5A/80A Class Iu	5A/80A Class Iu
		U99S1				3	6	TV3	TV3	3A/48A Class Iu	3A/48A Class Iu	3A/48A Class Iu

- Specifications in this catalog are presented basically for informative purposes. We request the exchange of official approval drawings before placing order.