
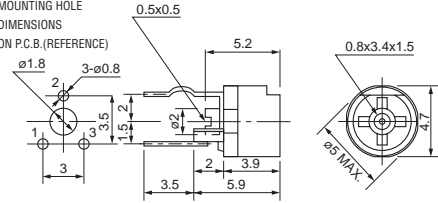

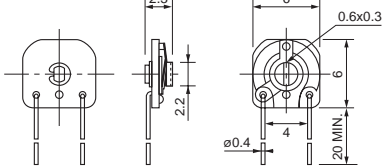

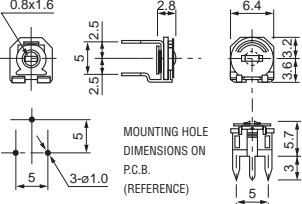

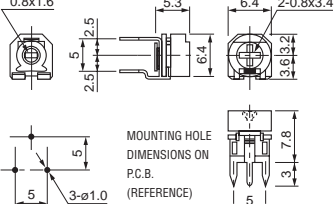

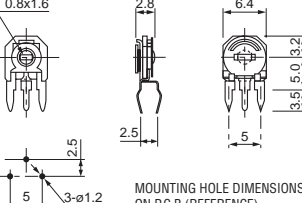

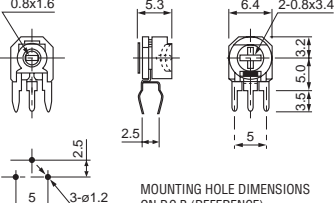

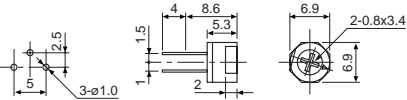

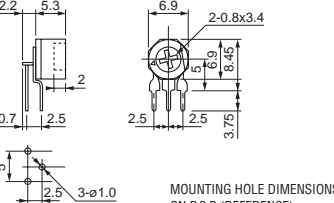

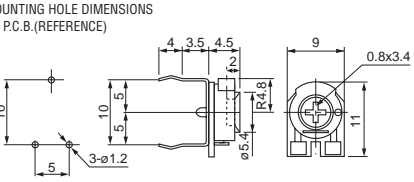

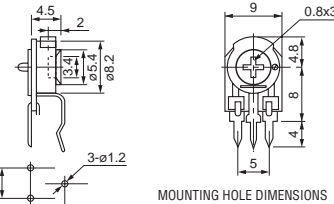

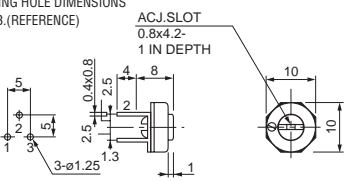

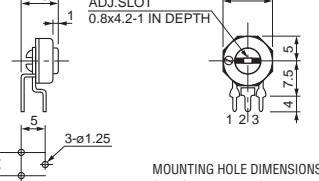


# Metal-glazed Trimmer Potentiometers

## Features:

- Excellent stability and environmental resistance by utilization of a metal glazed resistor element.
- Miniature, yet with high power handling capabilities.

<b>VM5CK-PV</b> (with Dust-proof Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p>	<b>TM6K3-2</b> 	
<b>VM6CK-PV</b> 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B. (REFERENCE)</p>	<b>VM6CK-PV(1S)</b> (with Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B. (REFERENCE)</p>
<b>VM6CK-PH</b> 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p>	<b>VM6CK-PH(1S)</b> (with Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p>
<b>TM64K2(PV)</b> (with Dust-proof Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p>	<b>TM64K2(PH)</b> (with Dust-proof Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p>
<b>TM8KV2-1S</b> (with Dust-proof Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p>	<b>TM8KH1-1S</b> (with Dust-proof Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p>
<b>TM10K(PV)</b> (with Dust-proof Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p> <p>ACJ.SLOT 0.8x4.2-1 IN DEPTH</p>	<b>TM10K(PH)</b> (with Dust-proof Knob) 	 <p>MOUNTING HOLE DIMENSIONS ON P.C.B.(REFERENCE)</p> <p>ADJ.SLOT 0.8x4.2-1 IN DEPTH</p>

	VM5CK	VM6CK	TM6K	TM64K	TM8K	TM10K
<b>Rotational Angle</b>	200±20°	200±10°	230°	200±10°	260±10°	200±10°
<b>Rotational Torque</b>	2-20mN·m (20-204gf·cm)	3-30mN·m (31-306gf·cm)	2-15mN·m (20-153gf·cm)	3-25mN·m (31-255gf·cm)	3-30mN·m (31-306gf·cm)	3-35mN·m (31-357gf·cm)
<b>Resistance Range</b>	100Ω-1MΩ (taper B)	200Ω-1MΩ (taper B)	50Ω-500kΩ (taper B)	100Ω-1MΩ (taper B)	200Ω-1MΩ (taper B)	100Ω-1MΩ (taper B)
<b>Resistance Tolerance</b>	±25%	±20%	±30%	±20%	±20%	±20%
<b>Rated Power</b>	0.2W	0.3W	0.1W	0.3W	0.5W	0.5W
<b>Maximum Rated Voltage</b>	AC 100V, DC 100V	AC 100V, DC 100V	AC 50V, DC 50V	AC 100V, DC 100V	AC 250V, DC 250V	AC 200V, DC 200V
<b>Temperature Coefficient</b>	Less than 100kΩ: ±200ppm/°C 100kΩ to 1MΩ: ±300ppm/°C	±200ppm/°C (500Ω-100kΩ)	±250ppm/°C (500Ω-100kΩ)	±200ppm/°C (500Ω-100kΩ)	±200ppm/°C (200Ω-100kΩ)	±300ppm/°C
<b>Operating Life</b>	50 cycles	50 cycles	50 cycles	50 cycles	100 cycles	100 cycles

• Specifications in this catalog are presented basically for informative purposes.  
We request the exchange of official approval drawings before placing order.